

MZ070184

MAGNETIC SENSORS • SENSORS FOR PNEUMATIC CYLINDERS

For many tasks in the field of automation technology, it is necessary to recognize the motional processes in pneumatic and hydraulic cylinders and to detect the position of the piston with precision. For this, magnetic cylinder sensors are used.




TECHNICAL DATA

Ambient temperature	-25 °C ... 70 °C
Cable length	0.3 m
Cross/short circuit identification possible	No
Cylinder sensors	Yes
Degree of protection (IP)	IP67
For T-groove	Yes
Harsh environmental conditions	Yes
Housing design	Cuboid
Housing material	Zinc die-cast
Increased ambient temperatures > 80°C	No
Low sensitivity	No
Low switching hysteresis	Yes
Material of cable sheath	Teflon
Max. output current	150 mA
Metal housing	Yes
Metallic sensor surface	No
Mounting access, cylinder groove	IV000198
Number of pins	3
Oil and cooling lubricants	Yes
Operating voltage	10 V ... 30 V
Reed contact	No
Reverse polarity protection	No
Sensor height	6.3 mm
Sensor length	30 mm
Sensor surface (active)	Middle area
Sensor surface position	Centre of the device
Sensor width	6.2 mm
Setting via teach-in	No
Short travel path	Yes
Short-circuit-proof	No

TECHNICAL DATA

Strong vibration / motion	Yes
Suitable for safety functions	No
Two switching points	No
Type of actuation	Magnet
Type of electrical connection	Cable connector M8
Type of electrical connection	Cable with connector
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage type	DC
With LED display	Yes
With monitoring function of downstream devices	No

CONNECTION

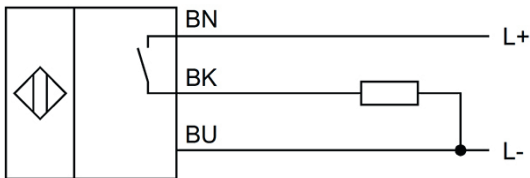

Colors: BN (brown), BU (blue), BK (black)

Functions: BN = L+, BU = L-, BK = PNP NO

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.

