


■ DIMENSION

-11N, -11P
-11N-QD, -11P-QD

-11D / -11D-QD


-11R / -11R-QD

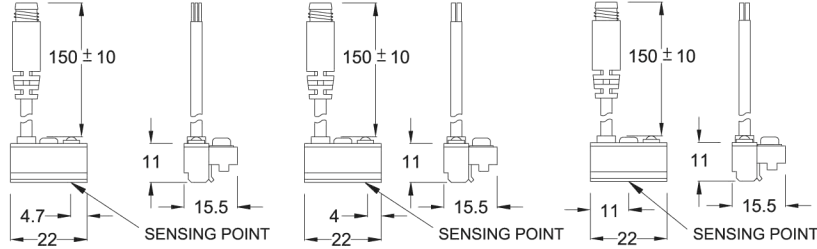


Unit:mm

■ QD PINOUT


*3 wire QD wiring



*2 wire QD wiring



*2 wire EQD wiring





■ SPECIFICATION

TYPE	BTC-11R	BTC-11D	BTC-11N	BTC-11P
CONNECT DIAGRAM				
CHARACTERISTICS				
WIRING METHOD	2-Wire Type		3-Wire Type	
SWITCHING LOGIC	SPST, Normally Open		Solid State Output, Normally Open	
SENSOR TYPE	Reed Switch	--	NPN Current Sinking	PNP Current Sourcing
OPERATING VOLTAGE	5~240V DC/AC	10~28V DC	5~30V DC	
SWITCHING CURRENT	100 mA max.	4~40 mA max.	200 mA max.	
CONTACT RATING (NOTE 1)	10 W max.	1.5 W max.	6 W max.	
CURRENT CONSUMPTION	--		22 mA @ 24V DC max.	20 mA @ 24V DC max.
VOLTAGE DROP	3.5 V max.		0.5 V max.	
LEAKAGE CURRENT	--	1 mA max	0.01 mA max.	
INDICATOR	Red LED	Green LED	Red LED	Green LED
CABLE	ø3.3, 2C, PVC		ø3.3, 3C, PVC	
OPERATING FREQUENCY	200 Hz		1000 Hz	
MAGNET REQUIREMENT (NOTE 2)	60 Gauss		40 Gauss	
TEMPERATURE RANGE	-10~70°C			
SHOCK (NOTE 3)	30 G		50 G	
VIBRATION (NOTE 4)	9 G			
ENCLOSURE CLASSIFICATION	IEC 529 IP 67			
PROTECTION CIRCUIT (NOTE 5)	1	4	3,4	

NOTE:

1. WARNING: Never exceed rating (Watt=Voltage x Amperage). Permanent damage to sensor will occur.
2. Measuring standard target: ø15.5xø8x5t (Anisotropy rubber magnet)
3. Sin wave / X, Y, Z 3 directions / 3 times each direction / 11 ms each time.
4. Double amplitude 1.5 mm / 10Hz~55Hz~10Hz (Sweep 1 min) / X, Y, Z 3 directions / 1 hour each time.
5. 1=None / 2=Short-circuit / 3=Power Source Reverse polarity / 4=Surge Suppression

■ GROOVE DIMENSION

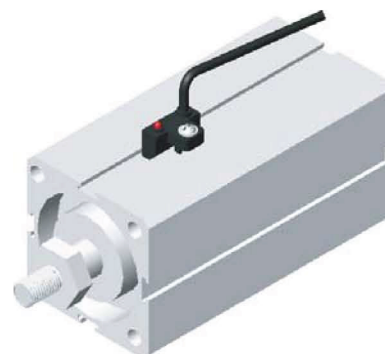

Unit:mm

Pressure Switch

Magnetic Switch

Circular Connector