

Tachogenerators

Solid shaft with EURO flange B10

With own bearings

7400-100-62



7400-100-62

Technical data - electrical ratings

Reversal tolerance	≤0.1 %
Linearity tolerance	≤0.15 %
Temperature coefficient	±0.05 %/K (open-circuit)
Isolation class	B
Calibration tolerance	±1 %
Climatic test	Humid heat, constant (IEC 60068-2-3, Ca)
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	CE

7400-100-62

Performance	12 W (speed ≥3000 rpm)
Armature-circuit time-constant	<75 μs
Open-circuit voltage	10...150 mV per rpm

7400-100-62

Performance	2x 3 W (speed ≥3000 rpm)
Armature-circuit time-constant	<40 μs
Open-circuit voltage	20...100 mV per rpm

Features

- Low response time
- Open circuit voltage 10...150 mV per rpm
- Redundant output (7400-100-62)
- EURO-flange B10 / solid shaft ø11 mm
- Very high resistance to shock
- High signal quality due to patented LongLife technology
- Recognition of sense of rotation possible via control

Optional

- Marine air protected/tropicalized
- Second shaft end (B14) / Housing foot (B3)

Technical data - mechanical design

Size (flange)	ø115 mm
Shaft type	ø11 mm solid shaft ø7 mm solid shaft (optional) ø14 mm solid shaft (optional)
Flange	EURO flange B10
Protection DIN EN 60529	IP 55, IP 56 (option)
Operating speed	≤10000 rpm
Torque	1.5 Ncm
Admitted shaft load	≤60 N axial ≤80 N radial
Materials	Housing: aluminium die-cast Shaft: stainless steel
Operating temperature	-30...+130 °C
Resistance	DIN EN 60068-2-6 Vibration 10 g, 10-2000 Hz IEC 60068-2-27 Shock 300 g, 1 ms
Connection	Terminal box

7400-100-62

Rotor moment of inertia	1.1 kgcm ²
Weight approx.	2.4 kg

7400-100-62

Rotor moment of inertia	1.2 kgcm ²
Weight approx.	2.9 kg

Tachogenerators

Solid shaft with EURO flange B10

With own bearings

7400-100-62

Part number

Tachogenerator

Twin tachogenerator

7400-100-62

Open-circuit voltage	
6	10 mV per rpm
7	20 mV per rpm
10	30 mV per rpm
5	40 mV per rpm
62	60 mV per rpm
3	100 mV per rpm
1	150 mV per rpm

Open-circuit voltage	
7	20 mV per rpm
5	40 mV per rpm
4	60 mV per rpm
3	100 mV per rpm

Data according to type


Type	Open-circuit voltage	Minimum load required depending on speed range [rpm]			Maximum operating speed	Armature resistance	Armature inductance
		0-3000	0-6000	0-n _{max}			
	U ₀	R _L	R _L	R _L	n _{max}	R _A (20°C)	L _A
	[mV/rpm]	[kΩ]	[kΩ]	[kΩ]	[rpm]	[Ω]	[mH]
	10	≥0.1	≥0.3	≥0.9	10000	3	6
7400-100	20	≥0.3	≥1.2	≥3.3	10000	11	23
7400-100	30	≥0.7	≥2.7	≥7.5	10000	26	50
7400-100	40	≥1.2	≥5	≥13.5	10000	47	90
7400-100-62	60	≥2.7	≥11	≥30	10000	99	200
7400-100	100	≥7.5	≥30	≥30	6000	271	550
7400-100	150	≥16	---	≥30	4000	630	1260

Twin tachogenerator with redundant output
(The data refer to each of the two tachogenerator outputs)


7400-100	20	≥1.2	≥4.8	≥14	10000	19	45
7400-100	40	≥4.8	≥20	≥54	10000	70	170
7400-100	60	≥11	≥44	≥120	10000	160	390
7400-100	100	≥30	≥120	---	6000	445	1080

Superimposed ripple (for τ_{RC} = 0.7 ms): ≤0.5% (peak-peak) ≤0.2% (rms)

Replacement switching diagram

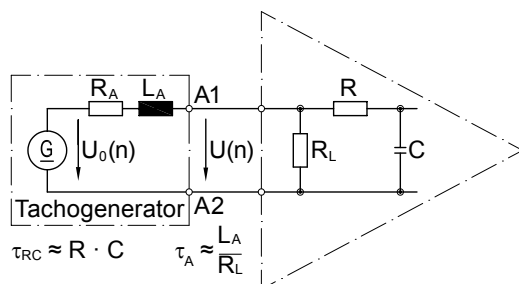

Polarity for positive rotating direction: A1 (7400-100-62: 1A1, 2A1): +
(VDE) A2(7400-100-62: 1A2, 2A2): - (VDE)



$$U(n) = U_0(n) \frac{R_L}{R_A + R_L} \approx U_0(n) \text{ for } R > R_L \gg R_A$$


Solid shaft with EURO flange B10 With own bearings

7400-100-62

Terminal assignment


View A - Connecting terminal 7400-100-62

Polarity for positive direction of rotation



View A - Connecting terminal 7400-100-62

Polarity for positive direction of rotation

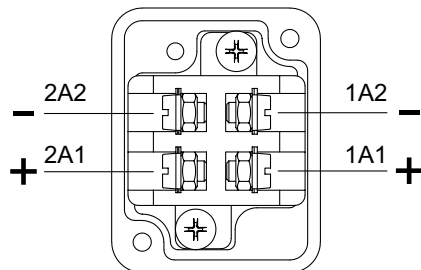

Accessories

Carbon brushes

Mounting accessories


K 35	Spring washer coupling for solid shaft $\varnothing 6...12$ mm
K 50	Spring washer coupling for solid shaft $\varnothing 11...16$ mm
K 60	Spring washer coupling for solid shaft $\varnothing 11...22$ mm

**Tachogenerators Solid shaft
with EURO flange B10 With own bearings**

7400-100-62

Dimensions

7400-100-62 - Version with Euro flange (B10)

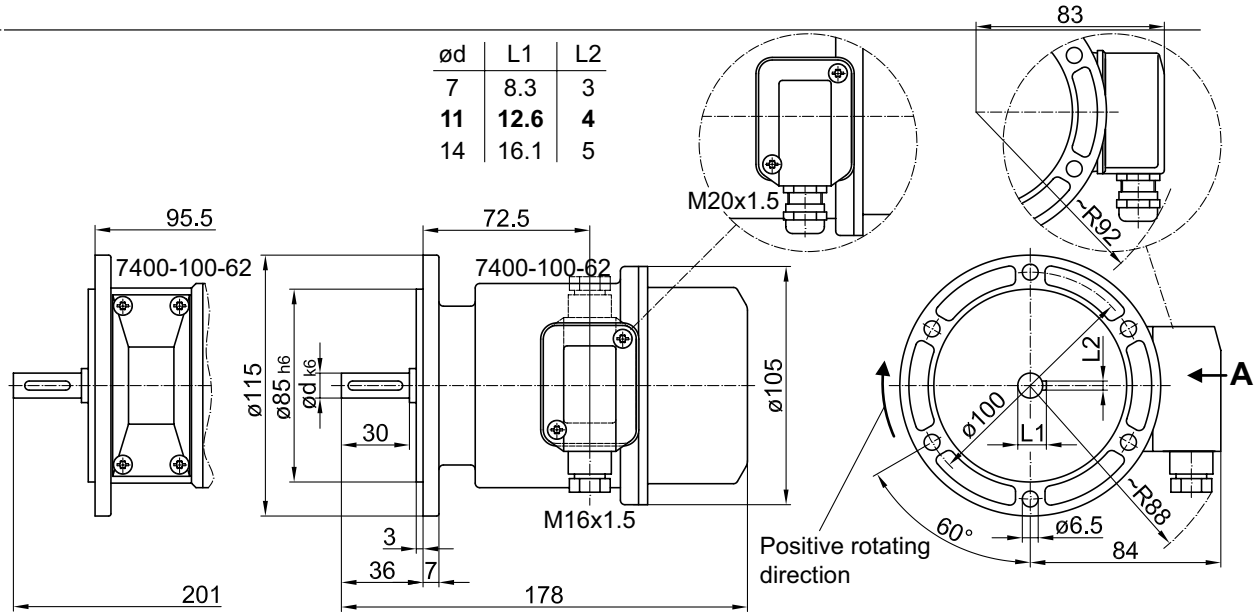

7400-100-62 - Version with housing foot (B3)

