




BTC108-1-0-3 NO KONTAK İKİ UÇLU 140VAC /200VDC 50CM KABLOLU
BTC108-3-4-3 NO KONTAK İKİ UÇLU 220VAC/ 250VDC 50CM KABLOLU

BTC108-5-1-3 NO+NC KONTAKLI ÜÇ UÇLU 125VAC /175VDC 50CM KABLOLU

BTC-108
Flange Reed Sensor

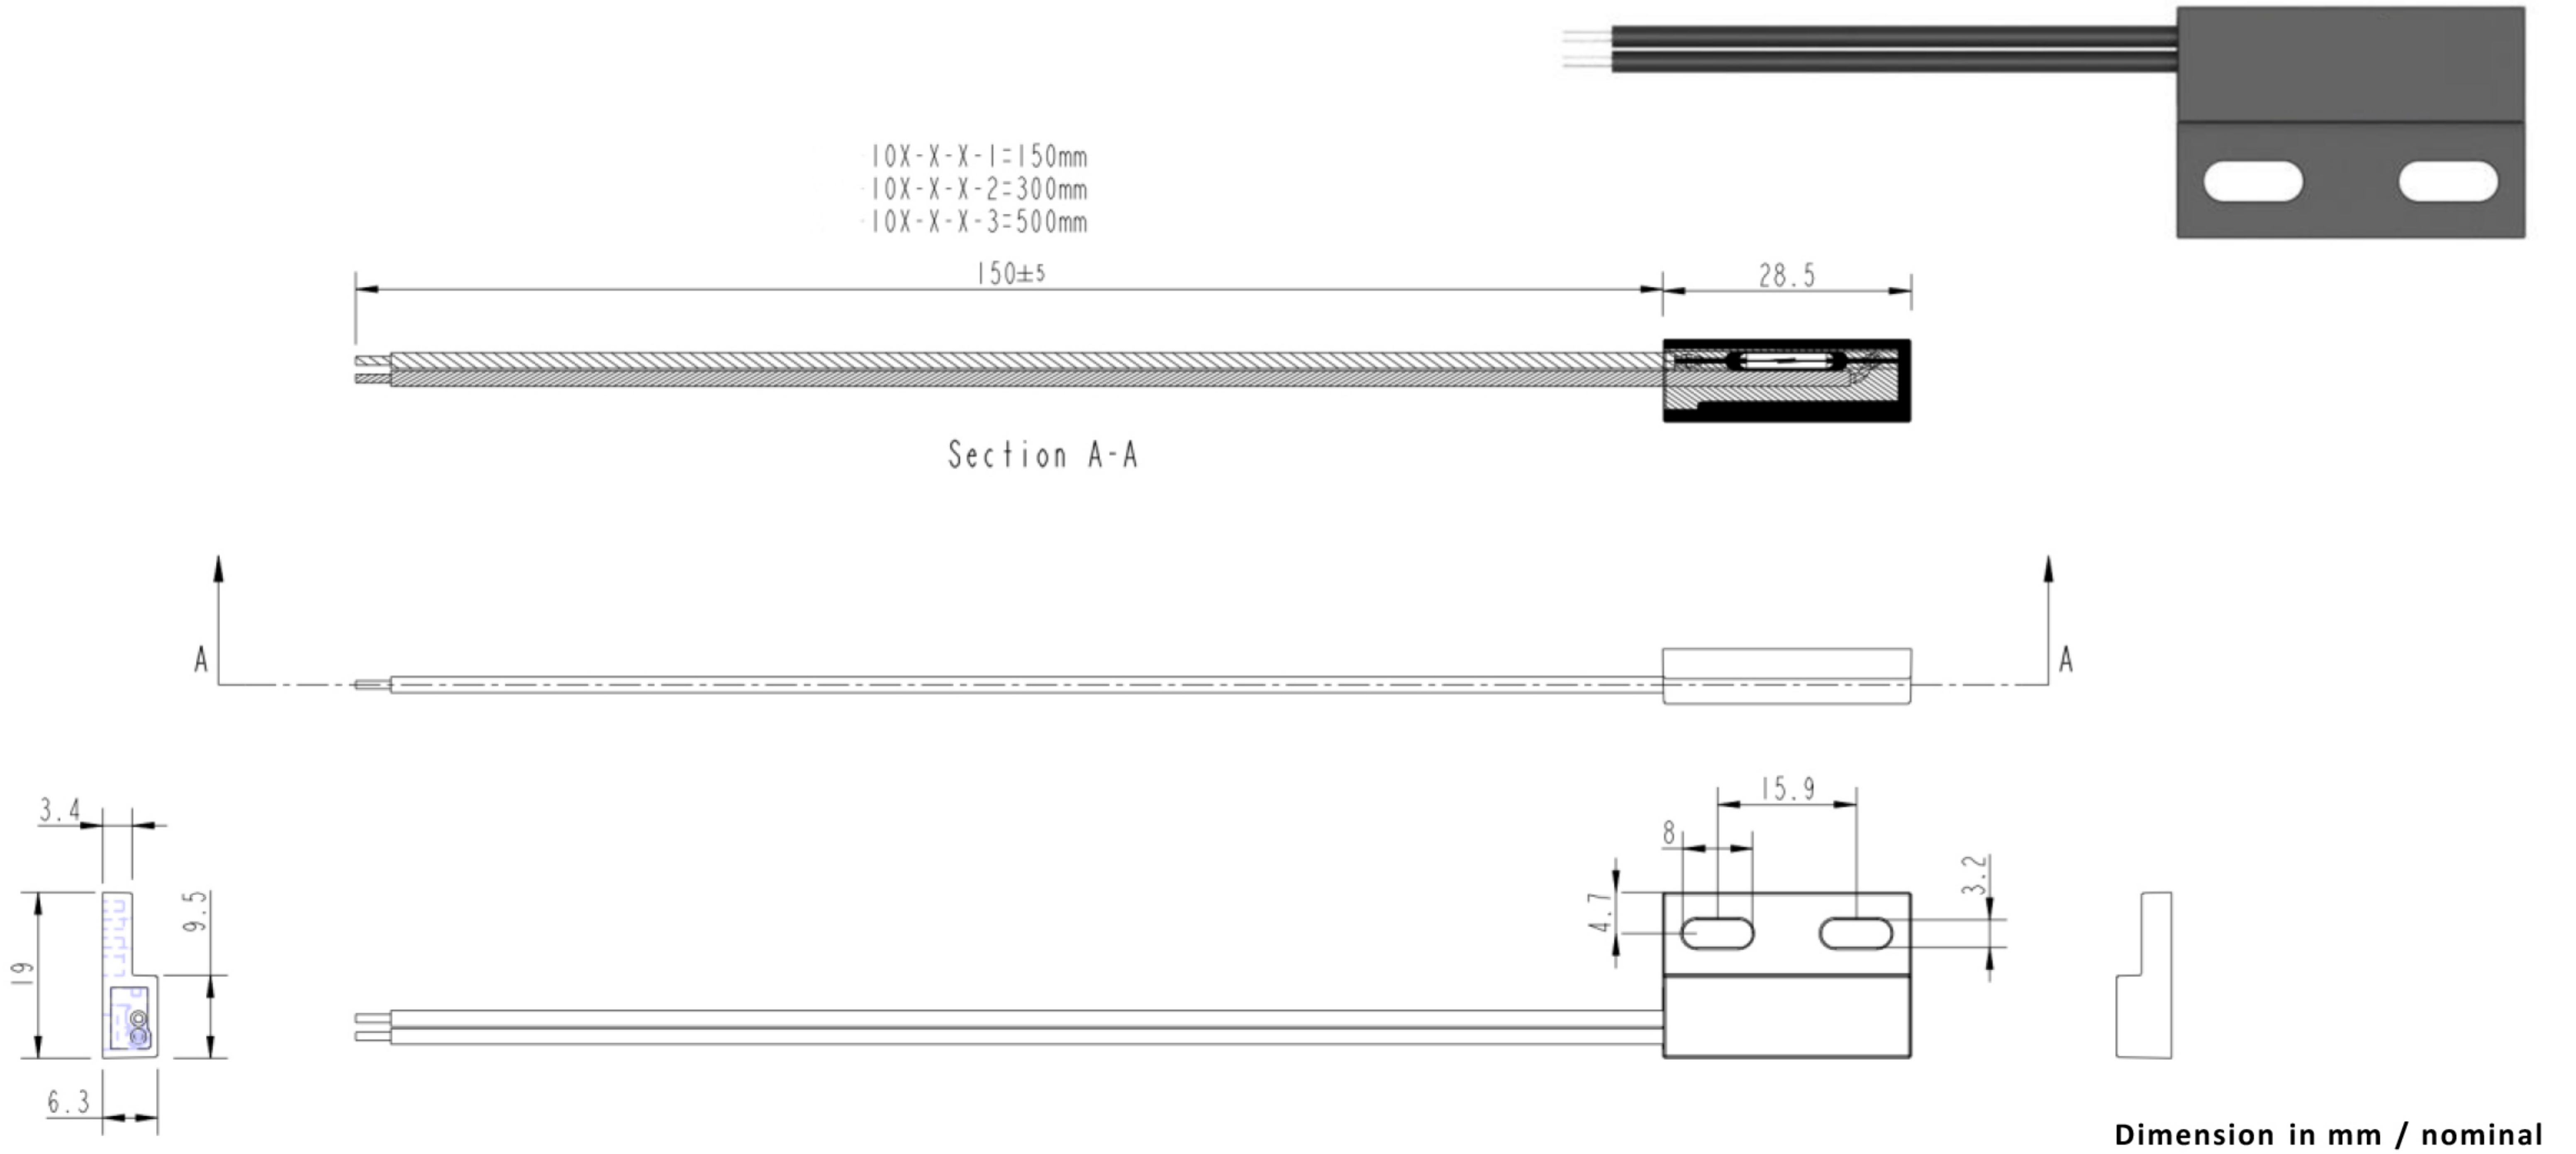

Electrical Characteristics							@25°C
Switch available for this series	—	1	2	3	4	5	
Contact form	—	A	A	A	B	C	
Contact rating max.	W/VA	10	10	50	5	5	
Switching voltage max.	VDC VAC	200 140	200 265	350 300	175 125	175 125	
Switching current max.	A	1.0	0.3	0.5	0.25	0.25	
Carry current	A	1.2	1.4	2.5	1.5	1.5	
Breakdown voltage min.	VDC	240	400	500	200	200	
Total resistance max. (initial)	Ω	150	150	200	200	200	
Operating Characteristics (of unmodified Reed Switch)							@25°C
Switch	—	1	2	3	4	5	
Switching frequency max.	Hz	500	400	500	100	100	
Resonant frequency typ.	Hz	4000	4000	2500	1100	1100	
Operate time max. (incl. bounce)	ms	1	0.6	1.1	0.7	0.7	
Release time max.	ms	0.4	0.2	0.05	1	1	