




Flachschalter Surface mount switches Interrupteurs plats

www.elobau.com

115 ...

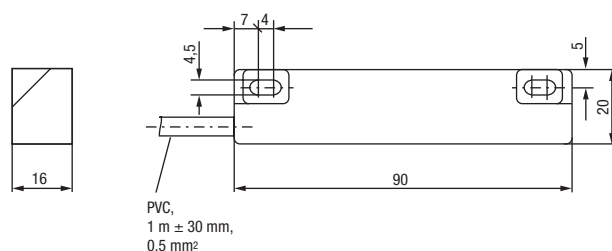

135 ...

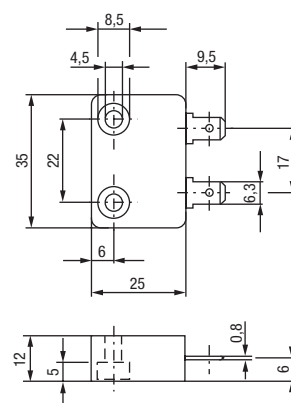

Typen Nr. type no. référence	Schaltspannung switching voltage tension de commut.	Schaltstrom switching current courant de commut.	Schaltleistung switching power pouvoir de coupure	Kontaktform* contact form* type de contact*
115 410	max. 250 V	max. 3,0 A	max. 100 W / 100 VA	A
115 420	max. 250 V	max. 3,0 A	max. 100 W / 100 VA	B
115 430	max. 230 V	max. 0,8 A	max. 40 W / 60 VA	C
135 310	max. 250 V	max. 1,5 A	max. 20 W / 30 VA	A
135 320	max. 250 V	max. 1,5 A	max. 20 W / 30 VA	B

Typen Nr. type no. référence	Schutzart protection class protection	Temperaturbereich temperature range plage de température	Material material matériaux
115 4.0	IP 67	-25...+75°C	PBT
135 3.0	IP 67 Schaltelement / switching element / élément de commutation IP 20 Stecker / connector / connecteur		PA

* A = Schließer, B = Öffner, C = Wechsler, A/B-bi = bistabiler Schließer/Öffner, C-bi = bistabiler Wechsler
A = N.O., B = N.C., C = C.O., A/B-bi = bistable N.O. / N.O., C-bi = bistable C.O.
A = NO, B = NF, C = inverseur, A/B-bi = NO/NF bistable, C-bi = inverseur bistable